


CinemaX D2 Smart

Laser Projection TV*



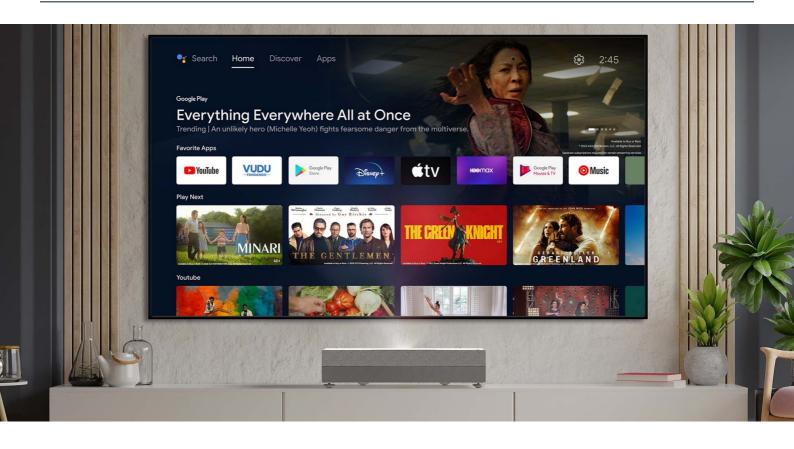

- True 4K UHD resolution with 8.3 million on-screen pixels - HDR and HLG compatibility with HDR brightness adjustment
- Big-screen 100-inch images from less than a foot away with an ultra-short throw lens - Low lag gaming - 16ms in 4K at 60Hz and 4ms in 1080P at 240Hz
- Simplify your entertainment experience with Android TV[™] - Enjoy access to 400,000+ movies, TV shows, live sports, and play music and games across streaming services
- Easy setup with geometry correction 3x3 warping function - Built-in 20W audio supports eARC

Smart 4K UHD ultra short throw projection

Easy access to everything you want to watch.

Simplify your entertainment experience with Android TV™ on the CinemaX D2 Smart ultra short throw projector.


Fniou access to 400 000+ movies TV shows live snorts and new music and names across streaming services and even customize vour

Specifications

EAN: 5055387666054, Colour: E	Black
EAN: 5055387666061, Colour: V	Vhite
UPC: 796435 81 449 6, Colour: Black	
JPC: 796435 81 448 9, Colour:	
Display/image	
Display technology	DLP™
Resolution	UHD (3840x2160)
Brightness	3,000 lumens
Contrast ratio	1,800,000:1
Native aspect ratio	16:9
Aspect ratio - compatible	4:3
Keystone correction -	10°
norizontal	100
Keystone correction - vertical	10°
lorizontal scan rate	31 ~ 135Khz
/ertical scan rate	24 ~ 120Hz
Jniformity	90% 2.16m - 2.05m (%5" - 1.20") diagonal
creen size	2.16m ~ 3.05m (85" ~ 120") diagonal
.amp info	Laser
ight source type .ASER life	Laser 30,000 hours
Optical	60,000 Houra
Throw ratio	0.25:1
Projection distance (m)	0.47m - 0.66m
ocal length (mm)	525mm/20.669"
lative offset	124%
Connectivity	· ⊨ · 70
Connections	Inpute 3 x HDMI 2.0.1 x R\$222
	Inputs 3 x HDMI 2.0, 1 x RS232 Outputs 1 x S/RDIE 1 x LISB-A power 1.5A, 1 x Audio
	Outputs 1 x S/PDIF, 1 x USB-A power 1.5A, 1 x Audio 3.5mm
Conorol	
General	26dB
loise level (typical)	26dB 28dB
loise level (max) PC compatibility	280B UHD, WQHD, WUXGA, FHD, UXGA, SXGA, WXGA, HD, XGA,
o companying	OHD, WQHD, WOXGA, FHD, OXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac
D compatibility	480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz),
	1080p(50/60Hz), 2160p(50/60Hz)
BD compatibility	Frame-pack: 1080p24, 720p50 / 60 Frame sequential: 1080p,
	WXGA, XGA, SVGA 120Hz
BD	3D ready
Security	Kensington Lock, Password protected interface
OSD / display languages	11 languages: English, French, German, Italian, Japanese,
	Portuguese, Russian, Chinese (simplified), Spanish, Chinese
Departing conditions	(traditional)
Operating conditions	5°C~40°C/41°F~104°F, max altitude 3000M/9843ft, max humidity 85%
Remote control	Backlit home remote
peaker count	2
Vatts per speaker	10W
n the box	AC power cord
	2x AAA batteries
	Basic user manual
	android TV stick & remote
nput lag	4.00ms
Power	
Power supply	100 ~ 240V, 50 ~ 60Hz
ower consumption (standby)	0.5W
ower consumption (min)	190W
ower consumption (max)	230W
Veight and dimensions	
Dimensions (W x D x H) mm	576 x 383 x 130
Vene unight	11.5 kg
Gross weight Net weight	







Copyright © 2022, Optoma and its logo is a registered trademark of Optoma Corporation. Optoma Europe Ltd is the licensee of the registered trademark. All other product names and company names used herein are for identification purposes only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted, all specifications are subject to change without notice. All images are for representation purposes only and may be simulated. "Google, Android TV, Google Play, YouTube, and other related marks and logos are trademarks of Google LLC." *Included in the box, the dongle must be connected to the projector via HDMI in order to utilise Android TV features. Google Assistant is not available in certain languages and countries. Availability of services varies by country and

language. 07102022024019