

- Slim even bezel and chassis
- USB playback photos, music & video
- Easy Multi-Screen Setups
- Remote configuration management
- Multiple HDMI devices control

The ViewSonic® CDE4320 is a 43" commercial display with a slim even bezel, offering the combination of cost-efficiency and ease of installation for corporate, retail and hospitality environments. Integrated with an embedded media player, the CDE4320 is able to easily playback high definition messaging via USB port. Versatile connectivity options include 2 HDMI-IN ports, RS232 input, SPDIF output etc. The slim-bezel CDE4320 delivers sharp and vivid images to ensure crisp pictures and smooth content playback.

## **Slim Even Bezel and Chassis**

With a slim even bezel width of only 1.3 cm, this commercial display delivers stunning images in a thin chassis.

**1.3 cm slim bezel**



## USB Playback Photos, Music & Video

A powerful multi-core media player enables photo, music and video playback in seconds using just a USB connection.

**Integrated USB multimedia player**





## Easy Multi-Screen Setups

This display is great for multi-screen setups in hotels, restaurants, sports bars, or retail outlets that require duplicated setup and customizable presets. With a USB-programmable hospitality setting, each display will have the same customized channel default, audio level, front-panel lockout, and auto power-up settings.


### Hospitality Mode



## Remote Configuration Management

vController™ software provides a simple and intuitive interface for remote management, OSD-related settings, and scheduling on deployed displays through RS232 or LAN.

**Display configuration software vController™**

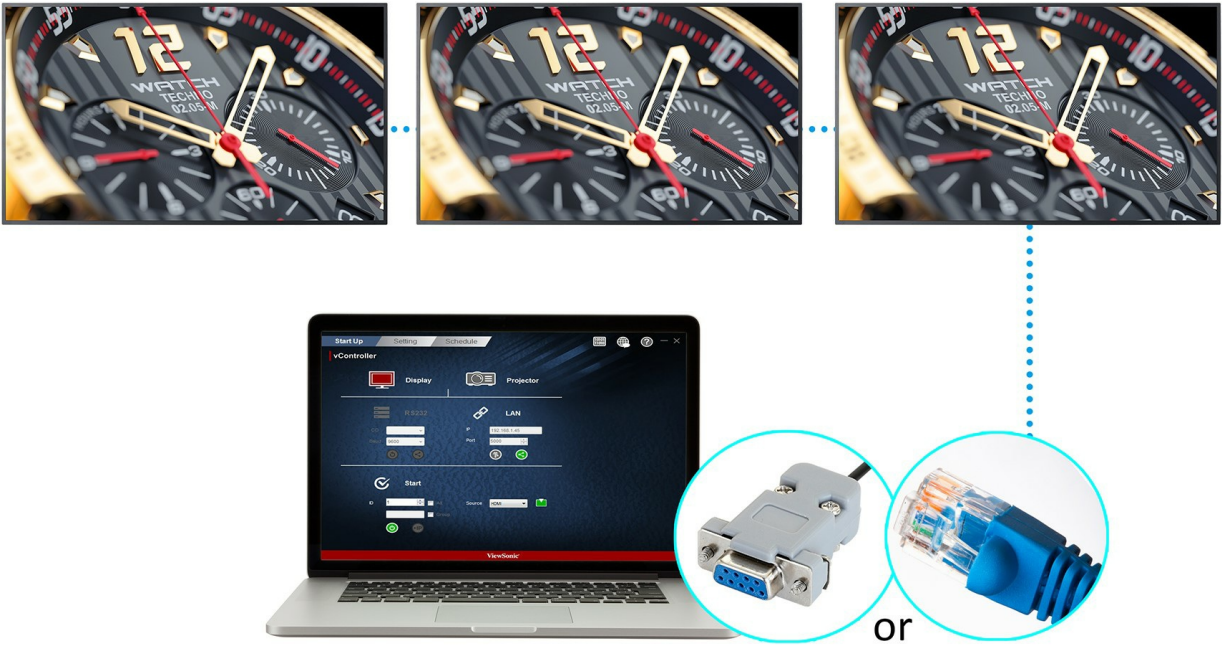

## Multiple HDMI Devices Control

With HDMI CEC functionality, remote control signals can be transmitted via HDMI cable to connected HDMI devices. This enables out-of-sight DVD players, sound systems, and other devices to be directly controlled with the display's remote controller.

### HDMI CEC local control



## Technical Specifications

<b>Display</b>	<b>Panel Size</b>	43"
	<b>Type/ Tech</b>	TFT LCD Module. IPS type, DLED backlight
	<b>Display Area (mm)</b>	41.184 (H) x 529.416 (V) (42.51" diagonal)
	<b>Native Resolution</b>	16:09
	<b>Aspect Ratio</b>	3840 x 2160
	<b>Colors</b>	1.07B colors
	<b>Brightness</b>	350 nits (typ.)
	<b>Contrast Ratio</b>	1100:1 Typ.
	<b>Response Time</b>	6 ms
	<b>Viewing Angles</b>	H = 178, V = 178 typ.
	<b>Backlight Life</b>	40,000 Hours Typ
	<b>Surface Treatment</b>	Anti-Glare, 2H, Haze 3%
	<b>Bezel</b>	Slim
<b>Orientation</b>	Landscape	
<b>INPUT</b>	<b>HDMI</b>	x2

	<b>DVI</b>	x1
	<b>Audio</b>	x1 (3.5mm)
	<b>RS-232</b>	x1
	<b>IR Pass Thru</b>	x1
<b>OUTPUT</b>	<b>Audio</b>	x1 (RCA)
	<b>SPDIF</b>	x1 (Fiber)
	<b>IR Pass Thru</b>	x1
<b>LAN</b>	<b>RJ45</b>	x1
<b>USB</b>	<b>Type A</b>	2.0 Type A : x2 (USB Playback)
<b>SPEAKERS</b>	<b>SPEAKERS</b>	10Wx2
<b>COMPATIBILITY</b>	<b>RGB PC/HDMI PC</b>	Up to 1920x1080@60Hz. Refer to timing table
	<b>HDMI</b>	480i, 480p,720p,1080i,1080p, 4K2K@60Hz
	<b>DVI</b>	480i, 480p,720p,1080i,1080p
	<b>Android Version</b>	Android 8.0
<b>POWER</b>	<b>Voltage</b>	100-240 VAC +/- 10% Wide Range
	<b>Consumption</b>	Normal 70 W, Max 85 W
<b>ERGONOMICS</b>	<b>Wall Mount (VESA® )</b>	400x200 mm
<b>OPERATING CONDITIONS</b>	<b>Temperature (° C)</b>	0 to 40°C
	<b>Humidity</b>	20% ~ 80% non-condensing
<b>DIMENSIONS (W x H x D)</b>	<b>Physical (inch / mm)</b>	38.19 x 21.98 x 3.33 in/969.9 x 558.3 x 84.6 mm
	<b>Packaging (inch / mm)</b>	42.13 x 26.10 x 6.02 in/1070 x 663 x 153 mm
<b>WEIGHT</b>	<b>Net (lb / kg)</b>	10.5 kg / 23.1 lbs (w/o stand); 11.1 kg / 24.47 lbs (with Stand)
	<b>Gross (lb / kg)</b>	13.5 kg / 29.76 lbs
<b>REGULATIONS</b>	<b>REGULATIONS</b>	cULus, FCC, Energy Star, TUV Mexico, Mexico Energy, CE, CB, RoHS, ErP, REACH, EEL, WEEE
<b>PACKAGE CONTENTS</b>	<b>PACKAGE CONTENTS</b>	<ol style="list-style-type: none"> <li>1. CDE4320 commercial display</li> <li>2. Remote Control with batteries</li> <li>4. Quick Start Guide</li> <li>5. Power Cables (1.8mm)</li> <li>6. HDMI cable (1.8mm)</li> <li>7. RS232 cable (1.8m)</li> </ol>