


Key Features

- Enhanced flexibility for various huddle spaces
- Smoother writing experience from 10-point intuitive In-cell Touch technology
- Simple and seamless content sharing with USB Type-C connectivity
- Wireless casting and remote management with myViewBoard™ ecosystem
- Built-in ViewBoard® Cast for simultaneous annotation and productive collaborations



Product **Description**

Give your huddle spaces the power and flexibility of hybrid collaborations with the sleek, compact ViewBoard[®] IFP4320 display. Designed to enhance smaller meeting spaces, the 43" screen boasts intuitive 10-point In-cell Touch technology for a smoother and more responsive writing experience with every tap, pinch, and swipe. Enjoy true interactivity and dynamic productivity with a single-cable plug-and-play solution from USB Type-C connectivity and seamless content sharing across different platforms. Integrated with myViewBoard ecosystem applications such as Whiteboard, Display, and Manager, you have complete control over huddle management, wireless content casting, and device settings wherever you are.

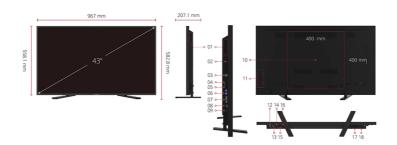

- Internal Speakers
 USB Type-C
 USB 2.0 Touch (Type-B)
- 8. DisplayPort 9. HDMI 2.0 10. VESA 400x400
- 15. SMART USB 16. SPDIF 17. AC In

4. Audio Out 5. PC Line-In 6. VGA 7. DVI-D 11. Menu Controls 12. RS232 13. LAN 14. USB 2.0 (Type-A)

18. Power

Visit Us — www.viewsonic.com

		. Compact Tienzeal ac interact	2.00.00)
DISPLAY		COMPATIBILITY	
Panel Size:	43"	RGB PC/HDMI PC:	1080p/4K @ 60Hz
Panel Type:	TFT LCD Module with ELED Backlight	HDMI:	3840x2160 @ 60Hz
		DisplayPort:	3840x2160 @ 60Hz
Display Area (mm):	941.184 (H) x 529.416 (V) (42.51" diagonal)	DVI:	3840x2160 @ 30Hz
Aspect Ratio:	16:9	EMBEDDED OS	
Resolution:	UHD 3840x2160(Pixels)	Android 8.0	
Colors:	1.07B colors (10bit)	BUNDLE SOFTWARE	
Brightness:	350 nits (typ.)	Basic Annotation Software:	myViewBoard Whiteboard for Android
Contrast Ratio:	1000:1		ViewBoard Cast &
Response Time:	9 ms	Wireless Presentation:	myViewBoard Display
Viewing Angles:	H = 178, V = 178 typ.	SPECIAL FEATURES	
Backlight Life:	30,000 Hours (Typ)	All-in-one USB port:	Bottom "Smart USB" port for all channels.
Surface Treatment:	Anti-Glare4H hardness	POWER	•
Bezel:	L:10.9/R:10.9/T:10.9/B:13.8 mm	Voltage:	100-240VAC +/- 10% Wide Range
Orientation:	Landscape	Consumption:	On:120W(typ.) / Off:
PLATFORM		·	<0.5W
Processor:	ARM Cortex A73 + A53	ERGONOMICS	400 × 400
RAM:	3GB DDR4	Wall Mount (VESA®): OPERATING CONDITIONS	400 x 400
Storage:	16 GB	Temperature (° C):	0°C to 40°C
TOUCH		. ,	20% ~ 80% RH Non-
Type/ Tech:	LGD In-cell 10 points touch	Humidity:	Condensing
Touch Resolution:	32767 x 32767	DIMENSIONS (W X H X D)	
Touch Point:	Windows/Android: 10 points touch	Physical (inch / mm):	967 x 558.1 x 55.7 mm / 38.072 x 21.973 x 2.193 in. (w/o Stand);
INPUT		i nysicai (mon / mm).	967 x 582.8 x 207.1 mm / 38.072 x 22.943
HDMI:	2.0 x1 (3840x2160 @60Hz)		x 8.155 in. (with Stand)
RGB / VGA:	x1	Packaging (inch / mm):	47.24 x 30.91 x 8.27 in.
DisplayPort:	x1	WEIGHT	
DVI:	x1		17.83 kg / 39.3 lbs
Audio:	x1 (PC audio in, 3.5mm jack)	Net (lb / kg):	(w/o Stand); 18.41 kg / 40.59 lbs (with Stand)
RS232:	x1	Gross (lb / kg):	22.63 kg / 49.89 lbs
OUTPUT		REGULATIONS	
Audio:	x1 (Earphone out)	cULus, FCC, Energy Star, CEC, Mexico Energy, CE, CB, RoHS, RACH	
SPDIF:	x1 (Fiber)	PACKAGE CONTENTS	
LAN		1. IFP4320	
RJ45:	x1	 Power Cables (1.8 M) Remote Control with batteries Quick Start Guide Stand (STND-056) HDMI cable (1.0M) USB Type-C Cable (1.0 M) USB Touch Cable (1.0 M) (Type A – Type B) RS232 Adapter (Female to Female) 	
USB			
Type A:	USB2.0 Bottom x2		
Type B:	x1 for HDMI/DP/DVI/VGA touch		
Type C:	x1 (DP1.2, 60W power delivery)		
SPEAKERS			
1014/ ** 0			

Copyright © ViewSonic Corporation 2000-2022. All rights reserved.

10W x 2