


Key Features

- 3.500 Ansi lumen
- 4K UHD met HDR support
- 2e generatie laser fosfor technologie
- Movie Mode met Notch Filter Technologie
- Cinema SuperColor Technology met Rec.709



Product Description

De LS700-4KP-projector combineert lasertechnologie met 4K Ultra HD-resolutie en 3.500 lumen met hoge helderheid en levert een eersteklas thuisbioscoop-ervaring in elke kamer, dag en nacht. Gebruikmakend van de nieuwste laserlichttechnologie die tot 20.000 uur meegaat, zorgt de LS700-4KP voor langdurig genot voor films, games en ander multimedia-entertainment. Met HDR-compatibiliteit, exclusieve Cinema SuperColor-technologie en echte Ultra HD 3840 x 2160-resolutie, levert de LS700-4KP een adembenemende thuisbioscoopervaring die je alleen in de bioscoop verwacht. Met een hoge helderheid en geoptimaliseerd geluid biedt deze projector heldere beelden en meeslepende audio in bijna elke kamer of omgeving, terwijl een ultralage invoerlatentie zorgt voor snellere frame-by-frame actie en soepele gameplay zonder vertraging. De installatie is ook een fluitje van een cent: 1,3x optische zoom en veelzijdige connectiviteitsopties zorgen voor een flexibelere montage en eenvoudige installatie. Voor een geweldige thuisbioscoopervaring met levensechte kleuren en vlijmscherpe details levert de LS700-4KP.

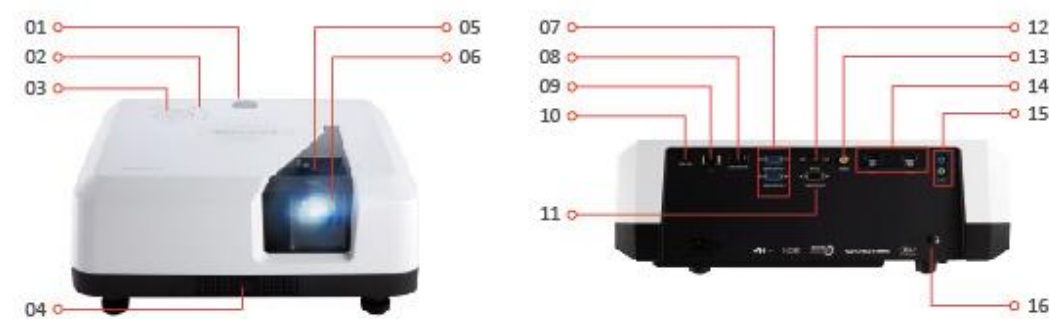

- | | | |
|---------------------|--------------------|---------------------|
| 1. Power Key/Top IR | 8. USB 5V/1.5A OUT | 15. Audio in/out |
| 2. LED indicator | 9. LEN | 16. Kensington Lock |
| 3. Keypad | 10. Mini USB | |
| 4. Front IR | 11. Monitor out | |
| 5. Zoom/Focus | 12. RS-232 | |
| 6. Lens | 13. Video | |
| 7. Computer In | 14. HDMI | |

SPECIFICATION

Native Resolution:	3840x2160
DMD Type:	DC3
Brightness:	3500 ANSI Lumens
Contrast Ratio:	3000000:1
Display Colour:	1.07 Billion Colours
Light Source Type:	Laser Phosphor system
Light Source Life (Normal):	up to 20000
Lamp Watt:	Nichia MCD
Lens:	F=1.9-2.49, f=12-15.6mm
Projection Offset:	100%+/-5%
Throw Ratio:	1.13-1.47
Optical Zoom:	1.3X
Digital Zoom:	0.8x- 2.0x
Image Size:	60"-300"
Throw Distance:	1.5-8.79m (100"@2.5m)
Keystone:	+/- 40° (V)
Audible Noise (Normal):	34dB
Audible Noise (Eco):	32dB
Input Lag:	50ms
Resolution Support:	VGA(640 x 480) to 4K(3840 x 2160)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p,2160P
Video Compatibility:	NTSC, PAL, SECAM
Horizontal Frequency:	15K-102KHz
Vertical Scan Rate:	23-120Hz

INPUT

Computer in (share with component):	2
Composite:	1
HDMI:	2 (HDMI 2.0/HDCP 2.2 x1, HDMI2.0/HDCP 1.4 x1)
Audio-in (3.5mm):	1
USB Type A:	1 (USB2.0 Reader, share with power)
RJ45 Input:	1 (LAN control)

OUTPUT

Monitor out:	1
Audio out (3.5mm):	1
Speaker:	2W
USB Type A (Power):	1 (5V/ 1.5A)

CONTROL

RS232 (DB 9-pin male):	1
RJ45:	1
USB Type Mini B (Services):	1

OTHERS

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz (AC in)
Power Consumption:	Normal: 260W Standby: <0.5W
Operating Temperature:	0~40°C
Net Weight:	7.14Kg
Gross Weight:	9.11Kg
Dimensions (WxDxH) with Adjustment Foot:	396x314x157mm
Packing Dimensions:	499x402x261mm
OSD Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Total 22 languages
User Guide Language:	English, S-Chinese, T-Chinese, Finnish,French,German,Italian,Japanese,Korean,Polish,Portuguese,Russian,Spanish,Swedish,Turkish, Total 15 languages

STANDARD ACCESSORY

Power Cord:	1
VGA Cable:	1
Remote Control:	1
QSG:	1